

PLASKOLITE, LLC

POST OFFICE BOX 1497
COLUMBUS, OH 43216
614/294-3281
FAX 614/297-7287

DOT STAMPING REQUIREMENTS


MOTOR VEHICLES

Stamping requirements for DOT motor vehicles are referenced in ANSI Z26.1: *American National Standard for Safety Glazing Materials for Glazing Motor Vehicles and Motor Vehicle Equipment Operating on Land Highways - Safety Standard, 1996*.

- Plaskolite encourages you to obtain your own DOT code number. To obtain a DOT number, new applicants can register online [via the Unified Registration System](#). The registration process is straight forward and free of charge.
- You may also use the Plaskolite DOT number, but if you do so, **you must also identify yourself as the fabricator**. Listed below are some examples.


General Markings: All safety glazing materials manufactured for use in accordance to ANSI Z26.1 standard shall be legibly and permanently marked in letters and numerals at least 1.78 mm (0.070 in) in height, with the words American National Standard or the characters "AS" and, in addition, with a model number that will identify the type of construction of the glazing material. They shall also be marked with the manufacturer's distinctive designation or trademark. In addition to the preceding markings and immediately adjacent to the words American National Standard or the characters AS, must list the compliance rating to which the glazing is rated.

Example Marking

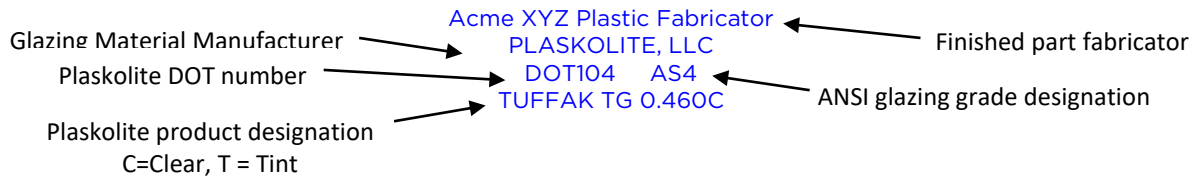

Bullet-Resistant (BR) Markings: Bullet-resistant glazing shall be marked as required herein except that following the letters AS and the numeral, the BR level shall be designated, in letters at least 1.78 mm (0.070 in) in height. Each manufacturer or distributor who cuts a section of safety glazing material shall mark that section in accordance with the requirements of this standard.

BR Example Marking

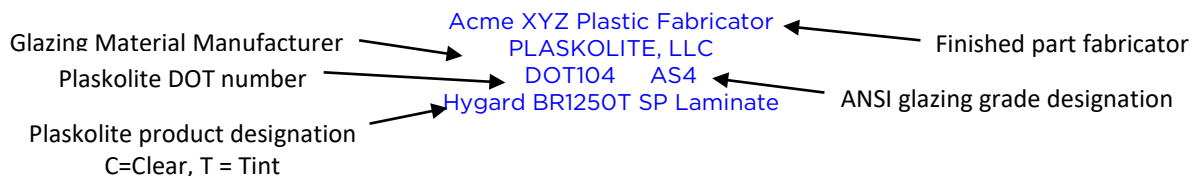

These examples are explicit to TUFFAK and Hygard polycarbonate. Plaskolite's DOT listing number is #104.

Product Designations for stamping:

C = Clear, T = Tint

For BR glazing add: MP for UL 752 L1 9mm, HP for L2 .357mag, or SP for L3 .44mag.

Other grades of TUFFAK meeting ANSI Z26.1 DOT auto safety standards include:

TUFFAK AR:	AS4
TUFFAK FP:	AS4
TUFFAK HV:	AS4
TUFFAK TG:	AS4
TUFFAK BG:	AS4
TUFFAK TX:	AS4
TUFFAK GP:	AS5
TUFFAK FC:	AS6

DISCLAIMER:

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determine the suitability of our materials and suggestions before adopting them on a commercial scale.