

TUFFAK UV POLYCARBONATE SHEET

EXTENDED UV RESISTANCE

TUFFAK UV sheet is a transparent polycarbonate product with an advanced UV resistance technology that assures long lasting outdoor weathering performance in flat and curved glazing applications. It has higher impact resistance than acrylic and glass, and it can be cold-formed during installation. TUFFAK UV is produced with high optical quality and minimal distortion in clear, a range of standard tints, or can be custom matched to any color. TUFFAK UV has a ten (10) year Limited Product Warranty against breakage, yellowing, and loss of light transmission. The terms of the warranty are available upon request.

APPLICATIONS

Awnings, skylights, barrel vaults, glazed archways, sloped, vertical, and curved glazing, recreational vehicles, SXS/UTV/LSV/Golf cart windshields


TYPICAL PROPERTIES*

Property	Test Method	Units	Values
PHYSICAL			
Specific Gravity	ASTM D 792	-	1.2
Refractive Index	ASTM D 542	-	1.586
Light Transmission, Clear @ 0.118"	ASTM D 1003	%	86
Light Transmission, I30 Gray @ 0.118"	ASTM D 1003	%	50
Light Transmission, K09 Bronze @ 0.118"	ASTM D 1003	%	50
Light Transmission, I35 Dark Gray @ 0.118"	ASTM D 1003	%	18
Water Absorption, 24 hours	ASTM D 570	%	0.15
Poisson's Ratio	ASTM E 132	-	0.38
MECHANICAL			
Tensile Strength, Ultimate	ASTM D 638	psi	9,500
Tensile Strength, Yield	ASTM D 638	psi	9,000
Tensile Modulus	ASTM D 638	psi	340,000
Elongation	ASTM D 638	%	110
Flexural Strength	ASTM D 790	psi	13,500
Flexural Modulus	ASTM D 790	psi	345,000
Compressive Strength	ASTM D 695	psi	12,500
Compressive Modulus	ASTM D 695	psi	345,000
Izod Impact Strength, Notched @ 0.125"	ASTM D 256	ft-lbs/in	16
Izod Impact Strength, Unnotched @ 0.125"	ASTM D 256	ft-lbs/in	60 (no break)
Instrumented Impact @ 0.125"	ASTM D 3763	ft-lbs	47
Shear Strength, Ultimate	ASTM D 732	psi	10,000
Shear Strength, Yield	ASTM D 732	psi	6,000
Shear Modulus	ASTM D 732	psi	114,000
Rockwell Hardness	ASTM D 785	-	M70 / R118
THERMAL			
Coefficient of Thermal Expansion	ASTM D 696	in/in/°F	3.75 x 10 ⁻⁵
Coefficient of Thermal Conductivity	ASTM C 177	BTU-in/hr-ft ² -°F	1.35
Heat Deflection Temperature @ 264 psi	ASTM D 648	°F	270
Heat Deflection Temperature @ 66 psi	ASTM D 648	°F	280
Brittleness Temperature	ASTM D 746	°F	-200
Shading Coefficient, Clear @ 0.236"	NFRC 100-2010	-	0.97
Shading Coefficient, Gray or Bronze @ 0.236"	NFRC 100-2010	-	0.77
U factor @ 0.236" (summer, winter)	NFRC 100-2010	BTU/hr-ft ² -°F	0.85, 0.92
U factor @ 0.375" (summer, winter)	NFRC 100-2010	BTU/hr-ft ² -°F	0.78, 0.85
ELECTRICAL			
Dielectric Constant @ 10 Hz	ASTM D 150	-	2.96
Dielectric Constant @ 60 Hz	ASTM D 150	-	3.17
Volume Resistivity	ASTM D 257	Ohm-cm	8.2 x 10 ⁶
Dissipation Factor @ 60 Hz	ASTM D 150	-	0.0009
Arc Resistance	-	-	-

*Typical properties are not intended for specification purposes


TUFFAK UV POLYCARBONATE SHEET

Impact Resistance*

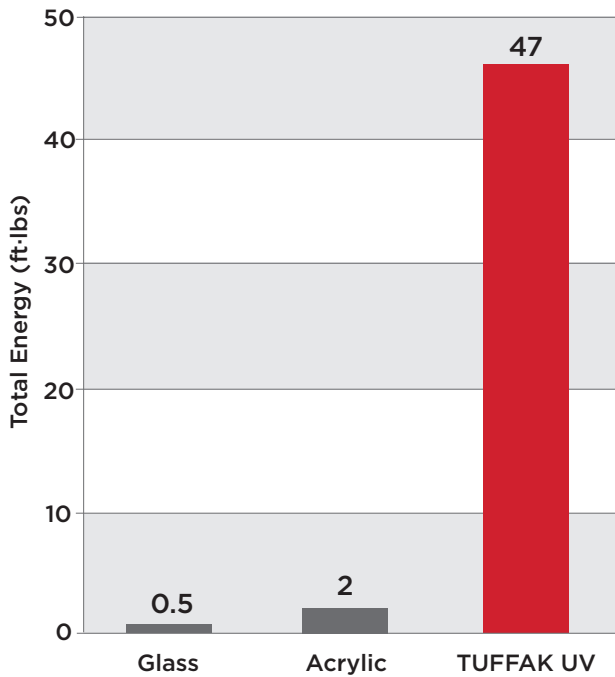

*Instrumented Impact per ASTM D 3763, sample thickness 0.125" nominal

UV Weather Resistance

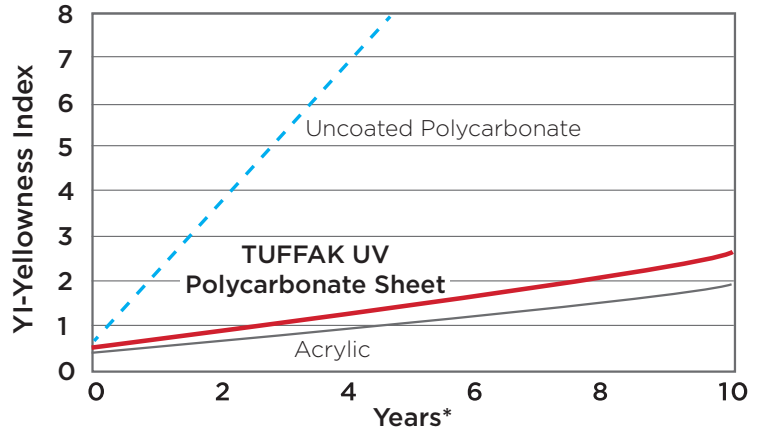

Visible yellowness at 8 or greater

*Based upon xenon WOM accelerated weathering for UV dose at mid-latitude location

Regulatory code compliance and certifications

ANSI Z97.1-2009, 2015: American National Standard for Safety Glazing Materials Used in Buildings - Safety Performance Specifications and Methods of Test, Class A, Unlimited

CPSC 16 CFR 1201 Category I and Category II: Safety Standard for Architectural Glazing Materials

Florida Building Code 2017
High Velocity Hurricane Zone Classified
Miami-Dade NOA: NOA

ICC-ES Evaluation Report ESR-2728

UL 94: Flammability File #E87887

UL 972: Burglary Resistant Glazing Materials, UL File #BP2126

UL 746C: Suitability for Outdoor Use, UL File #E87887

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

© 2024 PLASKOLITE, LLC 032024
TUFFAK* is a registered trademark of Plaskolite LLC

PLASKOLITE

400 W Nationwide Blvd, Suite 400
Columbus, OH 43215
800.848.9124 • Fax: 877.538.0754
plaskolite@plaskolite.com
www.plaskolite.com

PDS109_TUF_UV