

## TUFFAK FI polycarbonate sheet

### FLAME INHIBITING

TUFFAK FI sheet is a flame retardant, non-UV stabilized, clear polycarbonate product with a UL 94 V-0 rating at 0.060" and UL 94 5VA rating at 0.118". It features high impact strength, superior dimensional stability, high temperature resistance, and high clarity. This lightweight thermoformable sheet is also easy to fabricate and decorate.

### APPLICATIONS


Electrical devices, equipment housings, switchgear covers, light fixtures

### Typical Properties\*

Property	Test Method	Units	Values
<b>PHYSICAL</b>			
Specific Gravity	ASTM D 792	-	1.25
Light Transmission, Clear @ 0.118"	ASTM D 1003	%	86
Water Absorption, 24 hours @ 73°F	ASTM D 570	%	0.15
Poisson's Ratio	ASTM E 132	-	0.38
<b>MECHANICAL</b>			
Tensile Strength, Break	ASTM D 638	psi	9,500
Tensile Strength, Yield	ASTM D 638	psi	9,000
Tensile Modulus	ASTM D 638	psi	340,000
Flexural Strength	ASTM D 790	psi	13,500
Compressive Strength	ASTM D 695	psi	12,500
Izod Impact Strength, Notched @ 0.125"	ASTM D 256	ft-lbs/in	2
Izod Impact Strength, Unnotched @ 0.125"	ASTM D 256	ft-lbs/in	60 (no break)
Instrumented Impact @ 0.125"	ASTM D 3763	ft-lbs	46
<b>THERMAL</b>			
Coefficient of Thermal Expansion	ASTM D 696	in/in/°F	3.75 x 10 <sup>-5</sup>
Heat Deflection Temperature @ 264 psi	ASTM D 648	°F	270
Heat Deflection Temperature @ 66 psi	ASTM D 648	°F	280
<b>ELECTRICAL</b>			
Dielectric Constant @ 10 Hz	ASTM D 150	-	2.96
Dielectric Constant @ 60 Hz	ASTM D 150	-	3.17
Volume Resistivity	ASTM D 257	Ohm-cm	8.2 x 10 <sup>16</sup>
Dissipation Factor @ 60 Hz	ASTM D 150	-	0.0009
Arc Resistance	-	-	-
Stainless Steel Strip electrode	ASTM D 495	Seconds	10
Tungsten Electrodes	ASTM D 495	Seconds	120
Dielectric Strength, in air @ 0.125"	ASTM D 149	V/mil	380
<b>FLAMMABILITY</b>			
Flame Class @ 0.060"	UL 94	-	V-0
Flame Class @ 0.118"	UL 94	-	5VA
FAA Flammability	FAR 25.853		
@ 0.060" - 0.125"	Part 1, a (i) - 60 sec	-	Pass
@ 0.060" - 0.125"	Part 1, a (ii) - 12 sec	-	Pass

\*Typical properties are not intended for specification purposes

# TUFFAK FI polycarbonate sheet

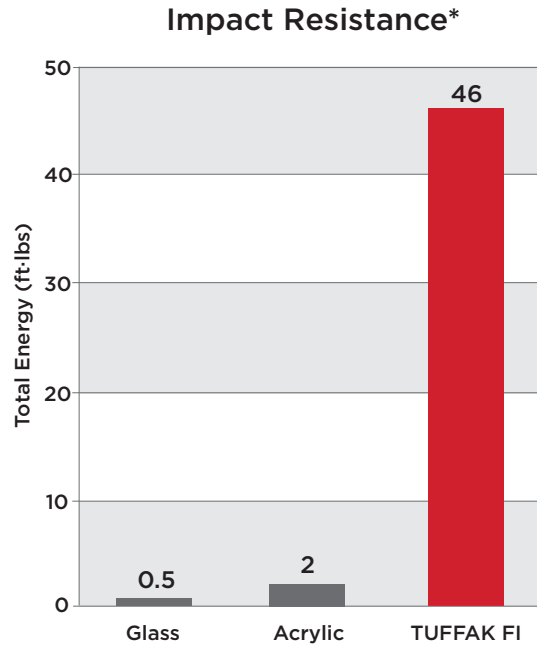

\*Instrumented Impact per ASTM D 3763,  
sample thickness 0.125" nominal

## Agency and specification compliance

Polycarbonate sheet classification	A-A-59502	Type II Class 2
Polycarbonate resin classification	ASTM D 3935	PC0120
Flammability - Plastic component	UL 94	UL File #E351891
Flammability - FAA	FAR 25.853	Part 1 60-second and 12-second

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determine the suitability of our materials and suggestions before adopting them on a commercial scale.

© 2018 **PLASKOLITE, LLC** 082018  
TUFFAK® is a registered trademark of Plaskolite LLC

**PLASKOLITE**

400 Nationwide Blvd, Suite 400  
Columbus, OH 43215  
800.254.1707 • Fax: 800.457.3553  
plaskolite@plaskolite.com  
www.plaskolite.com

PDS003